

HC 38 K - HC 38 K BC



I MIGLIORI PRODOTTI DI QUALITÀ | BEST QUALITY PRODUCTS

www.hcindustrie.com



mm. 2500

365°

mat. 39 Ni Cr Mo3

4 l/min. 15



lt. 25

bar 270

Kq. 375

tm 2,7


Verticale Vertical - Vertical - Vertical

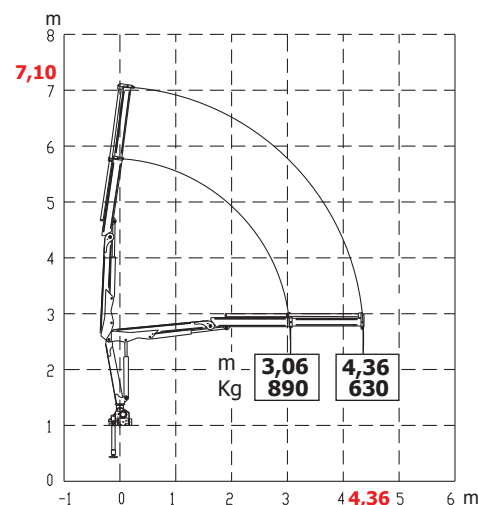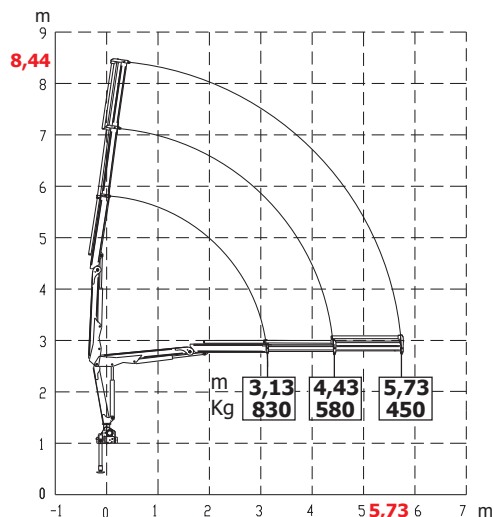

Kg. 415

tm 2,35

Verticale Vertical - Vertical - Vertical

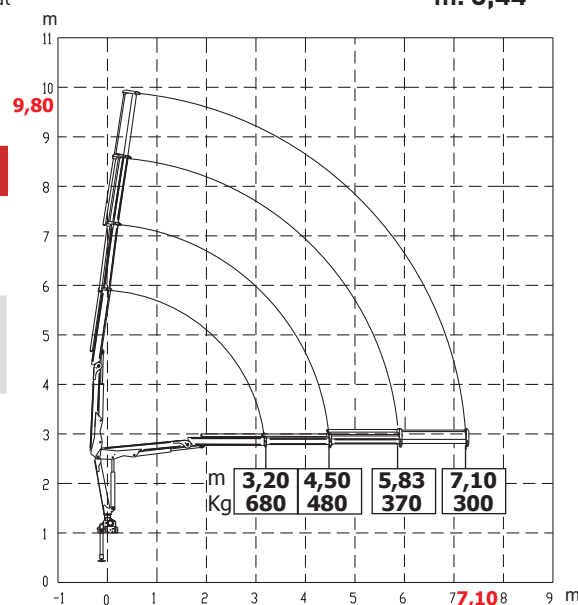


Kg. 395

tm 2,5

m. 5,73

Verticale Vertical - Vertical - Vertical

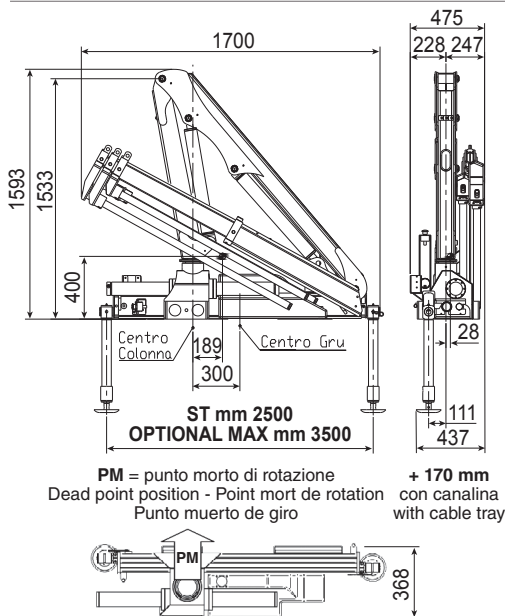

PM = punto morto di rotazione
Dead point position - Point mort de rotation
Punto muerto de giro

+ 170 mm
con canalina
with cable tray

GRU STANDARD K BC Std Crane - Grue Standard - Grúa standard

Bracci stabilizzatori standard

Std outrigger booms - Bras de stabilisation std. - Brazos estabilizadores std.

mm. 2500

Angolo di rotazione

Slewing angle - Angle de rotation - Giro

365°

Tiranti di ancoraggio (15 kg)

Tie rods for anchorage - Tirants d'ancrage - Tirantes de fijación

n°6 M18x1,5
mat. 39 Ni Cr Mo3

Portata raccomandata

Recommended oil flow - Débit recommandé - Caudal requerido

l/min. 15

Capacità del serbatoio

Tank capacity - Capacité du réservoir - Capacidad del depósito de aceite

lt. 25

Pressione massima

Rated pressure - Pression maxi - Presión máxima

bar 270

HC 38 K BC A1

Massa della gru senza olio nel serbatoio

Overhang crane without oil in the tank - Poids de la grue sans huile dans le réservoir - Peso de la grúa sin aceite en el depósito

Kg. 360

Momento di sollevamento massimo

Maximum lifting moment - Moment de levage maxi - Momento de elevación máxima

tm 2,72

Sbraccio oleodinamico



Maximum hydraulic reach - Déport hydraulique - Alcance hidráulico

Orizzontale Horizontal - Horizontal - Horizontal

Verticale Vertical - Vertical - Vertical

m. 3,06

m. 5,81

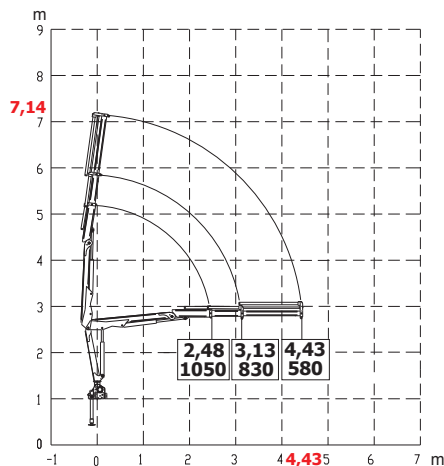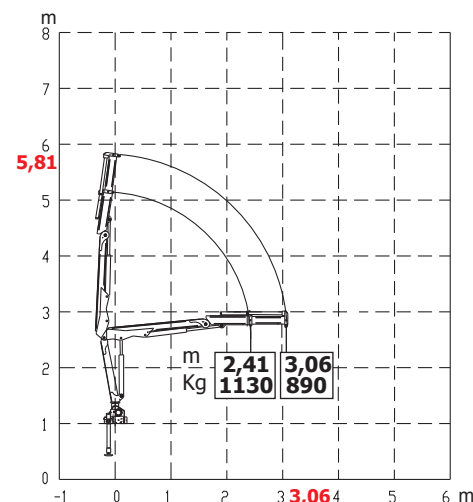

HC 38 K BC A2

Massa della gru senza olio nel serbatoio

Overhang crane without oil in the tank - Poids de la grue sans huile dans le réservoir - Peso de la grúa sin aceite en el depósito

Kg. 380

Momento di sollevamento massimo

Maximum lifting moment - Moment de levage maxi - Momento de elevación máxima

tm 2,60

Sbraccio oleodinamico


Maximum hydraulic reach - Déport hydraulique - Alcance hidráulico

Orizzontale Horizontal - Horizontal - Horizontal

Verticale Vertical - Vertical - Vertical

m. 4,43

m. 7,14

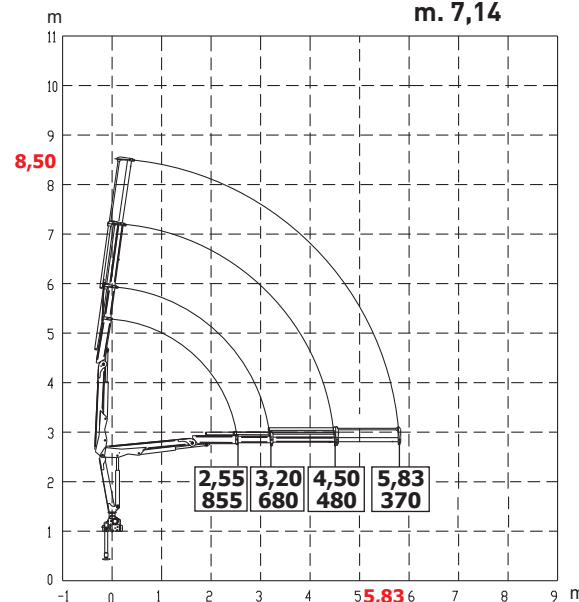

HC 38 K BC A3

Massa della gru senza olio nel serbatoio

Overhang crane without oil in the tank - Poids de la grue sans huile dans le réservoir - Peso de la grúa sin aceite en el depósito

Kg. 400

Momento di sollevamento massimo

Maximum lifting moment - Moment de levage maxi - Momento de elevación máxima

tm 2,18

Sbraccio oleodinamico

Maximum hydraulic reach - Déport hydraulique - Alcance hidráulico

Orizzontale Horizontal - Horizontal - Horizontal

Verticale Vertical - Vertical - Vertical

m. 5,83

m. 8,50

mod. HC 38 K BC



mod. HC 38 K



HC INDUSTRIE S.R.L.
Via Luciano Romagnoli, 1
42023 Cadelbosco di Sopra Reggio Emilia, Z.I. La Madonnina (RE)
Phone +39.0522.911729 - Fax +39.0522.404040
Email: commerciale@hcinindustrie.com - Website: www.hcinindustrie.com